


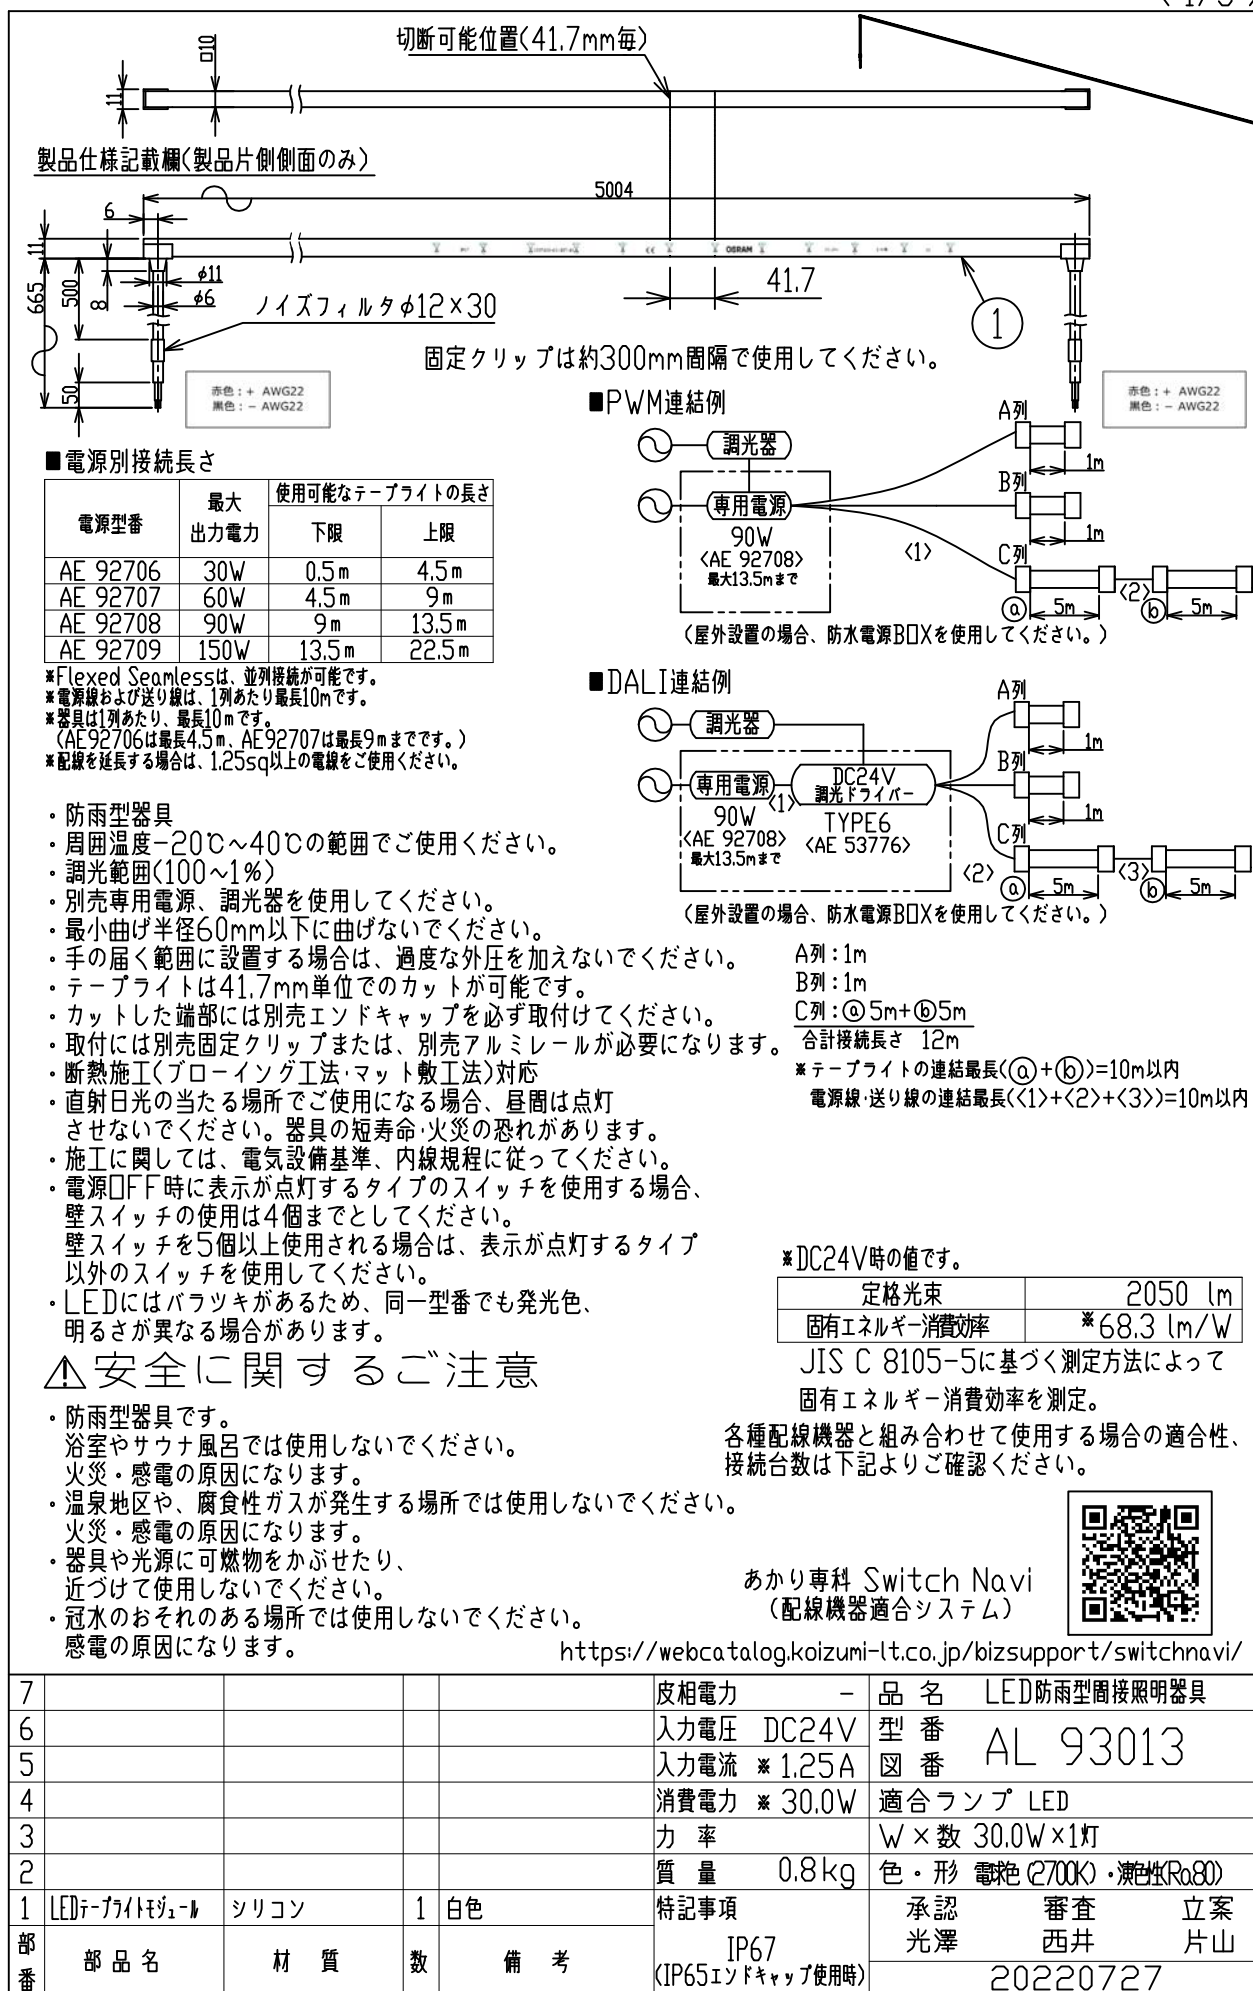



■入力特性表（電源接続時） PWM電気特性

テ ー プ ラ イ ト 全 長 (m)	適合電源															
	AE92709				AE92708				AE92707				AE92706			
	150W				90W				60W				30W			
	AC100V		AC200V		AC100V		AC200V		AC100V		AC200V		AC100V		AC200V	
	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)
22.5	1.52	151.7	0.74	147.9	-	-	-	-	-	-	-	-	-	-	-	-
22	1.49	148.4	0.72	144.7	-	-	-	-	-	-	-	-	-	-	-	-
21.5	1.45	145.0	0.71	141.4	-	-	-	-	-	-	-	-	-	-	-	-
21	1.42	141.6	0.69	138.2	-	-	-	-	-	-	-	-	-	-	-	-
20.5	1.39	138.2	0.67	135.0	-	-	-	-	-	-	-	-	-	-	-	-
20	1.35	134.9	0.66	131.8	-	-	-	-	-	-	-	-	-	-	-	-
19.5	1.32	131.5	0.64	128.6	-	-	-	-	-	-	-	-	-	-	-	-
19	1.29	128.1	0.62	125.3	-	-	-	-	-	-	-	-	-	-	-	-
18.5	1.25	124.7	0.61	122.1	-	-	-	-	-	-	-	-	-	-	-	-
18	1.22	121.4	0.59	118.9	-	-	-	-	-	-	-	-	-	-	-	-
17.5	1.18	118.0	0.57	115.7	-	-	-	-	-	-	-	-	-	-	-	-
17	1.15	114.6	0.56	112.4	-	-	-	-	-	-	-	-	-	-	-	-
16.5	1.12	111.3	0.54	109.2	-	-	-	-	-	-	-	-	-	-	-	-
16	1.08	107.9	0.53	106.0	-	-	-	-	-	-	-	-	-	-	-	-
15.5	1.05	104.5	0.51	102.8	-	-	-	-	-	-	-	-	-	-	-	-
15	1.02	101.1	0.49	99.5	-	-	-	-	-	-	-	-	-	-	-	-
14.5	0.98	97.8	0.48	96.3	-	-	-	-	-	-	-	-	-	-	-	-
14	0.95	94.4	0.46	93.1	-	-	-	-	-	-	-	-	-	-	-	-
13.5	0.92	91.0	0.44	89.9	0.93	93.1	0.44	91.7	-	-	-	-	-	-	-	-
13	-	-	-	-	0.89	89.6	0.42	88.3	-	-	-	-	-	-	-	-
12.5	-	-	-	-	0.86	86.1	0.41	85.0	-	-	-	-	-	-	-	-
12	-	-	-	-	0.82	82.7	0.39	81.7	-	-	-	-	-	-	-	-
11.5	-	-	-	-	0.79	79.2	0.38	78.3	-	-	-	-	-	-	-	-
11	-	-	-	-	0.75	75.7	0.36	75.0	-	-	-	-	-	-	-	-
10.5	-	-	-	-	0.72	72.2	0.34	71.7	-	-	-	-	-	-	-	-
10	-	-	-	-	0.69	68.8	0.33	68.3	-	-	-	-	-	-	-	-
9.5	-	-	-	-	0.65	65.3	0.31	65.0	-	-	-	-	-	-	-	-
9	-	-	-	-	0.62	61.8	0.29	61.6	0.63	62.9	0.31	61.9	-	-	-	-
8.5	-	-	-	-	-	-	-	-	0.60	59.4	0.29	58.6	-	-	-	-
8	-	-	-	-	-	-	-	-	0.56	56.0	0.27	55.3	-	-	-	-
7.5	-	-	-	-	-	-	-	-	0.53	52.5	0.26	52.0	-	-	-	-
7	-	-	-	-	-	-	-	-	0.49	49.1	0.24	48.6	-	-	-	-
6.5	-	-	-	-	-	-	-	-	0.46	45.6	0.22	45.3	-	-	-	-
6	-	-	-	-	-	-	-	-	0.42	42.2	0.21	42.0	-	-	-	-
5.5	-	-	-	-	-	-	-	-	0.39	38.7	0.19	38.6	-	-	-	-
5	-	-	-	-	-	-	-	-	0.35	35.3	0.17	35.4	-	-	-	-
4.5	-	-	-	-	-	-	-	-	0.32	31.9	0.16	32.1	0.33	32.3	0.16	31.5
4	-	-	-	-	-	-	-	-	-	-	-	-	0.29	28.7	0.14	28.0
3.5	-	-	-	-	-	-	-	-	-	-	-	-	0.26	25.0	0.12	24.4
3	-	-	-	-	-	-	-	-	-	-	-	-	0.22	21.4	0.10	20.9
2.5	-	-	-	-	-	-	-	-	-	-	-	-	0.18	17.8	0.09	17.4
2	-	-	-	-	-	-	-	-	-	-	-	-	0.15	14.3	0.07	14.0
1.5	-	-	-	-	-	-	-	-	-	-	-	-	0.12	10.8	0.06	10.6
1	-	-	-	-	-	-	-	-	-	-	-	-	0.09	7.3	0.04	7.2
0.5	-	-	-	-	-	-	-	-	-	-	-	-	0.06	3.9	0.03	3.8


※1列あたり最長10mです。(AE92706は最長4.5m、AE92707は最長9mまでです。)

■最小施工寸法

〈固定クリップ・アルミレール〉 〈埋込〉 〈密閉〉



※床置きのみ



型 番 AL 93013
色・形 電線 (2700K)・難燃(Ro80)
20220727

単位：mm 第三角法(JIS A4)

コイズミ照明株式会社

■入力特性表（電源＋調光ドライバー接続時） DALI電気特性

テ ー プ ラ イ ト 全 長 (m)	適 合 D C 2 4 V 調 光 ド ラ イ バ ー	適合電源															
		AE92709				AE92708				AE92707				AE92706			
		150W				90W				60W				30W			
		AC100V		AC200V		AC100V		AC200V		AC100V		AC200V		AC100V		AC200V	
		入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)	入力 電流 (A)	消費 電力 (W)
22.5	A E 5 3 7 7 6	1.56	155.8	0.76	151.8	-	-	-	-	-	-	-	-	-	-	-	-
22		1.53	152.4	0.74	148.5	-	-	-	-	-	-	-	-	-	-	-	-
21.5		1.49	149.0	0.73	145.3	-	-	-	-	-	-	-	-	-	-	-	-
21		1.46	145.7	0.71	142.1	-	-	-	-	-	-	-	-	-	-	-	-
20.5		1.43	142.3	0.69	138.9	-	-	-	-	-	-	-	-	-	-	-	-
20		1.39	138.9	0.68	135.6	-	-	-	-	-	-	-	-	-	-	-	-
19.5		1.36	135.5	0.66	132.4	-	-	-	-	-	-	-	-	-	-	-	-
19		1.33	132.2	0.64	129.2	-	-	-	-	-	-	-	-	-	-	-	-
18.5		1.29	128.8	0.63	126.0	-	-	-	-	-	-	-	-	-	-	-	-
18		1.26	125.4	0.61	122.8	-	-	-	-	-	-	-	-	-	-	-	-
17.5		1.23	122.1	0.59	119.5	-	-	-	-	-	-	-	-	-	-	-	-
17		1.19	118.7	0.58	116.3	-	-	-	-	-	-	-	-	-	-	-	-
16.5		1.16	115.3	0.56	113.1	-	-	-	-	-	-	-	-	-	-	-	-
16		1.12	111.9	0.55	109.9	-	-	-	-	-	-	-	-	-	-	-	-
15.5		1.09	108.6	0.53	106.6	-	-	-	-	-	-	-	-	-	-	-	-
15		1.06	105.2	0.51	103.4	-	-	-	-	-	-	-	-	-	-	-	-
14.5		1.02	101.8	0.50	100.2	-	-	-	-	-	-	-	-	-	-	-	-
14		0.99	98.4	0.48	97.0	-	-	-	-	-	-	-	-	-	-	-	-
13.5		0.96	95.1	0.46	93.7	0.97	97.2	0.46	95.7	-	-	-	-	-	-	-	-
13		-	-	-	-	0.93	93.8	0.44	92.4	-	-	-	-	-	-	-	-
12.5		-	-	-	-	0.90	90.3	0.43	89.0	-	-	-	-	-	-	-	-
12		-	-	-	-	0.86	86.8	0.41	85.7	-	-	-	-	-	-	-	-
11.5		-	-	-	-	0.83	83.4	0.40	82.3	-	-	-	-	-	-	-	-
11		-	-	-	-	0.80	79.9	0.38	79.0	-	-	-	-	-	-	-	-
10.5		-	-	-	-	0.76	76.4	0.36	75.7	-	-	-	-	-	-	-	-
10		-	-	-	-	0.73	72.9	0.35	72.3	-	-	-	-	-	-	-	-
9.5		-	-	-	-	0.69	69.5	0.33	69.0	-	-	-	-	-	-	-	-
9		-	-	-	-	0.66	66.0	0.31	65.6	0.67	67.0	0.33	65.9	-	-	-	-
8.5		-	-	-	-	-	-	-	-	0.64	63.6	0.31	62.6	-	-	-	-
8		-	-	-	-	-	-	-	-	0.60	60.1	0.29	59.3	-	-	-	-
7.5		-	-	-	-	-	-	-	-	0.57	56.7	0.28	56.0	-	-	-	-
7		-	-	-	-	-	-	-	-	0.53	53.2	0.26	52.6	-	-	-	-
6.5		-	-	-	-	-	-	-	-	0.50	49.8	0.24	49.3	-	-	-	-
6		-	-	-	-	-	-	-	-	0.46	46.3	0.23	46.0	-	-	-	-
5.5		-	-	-	-	-	-	-	-	0.43	42.9	0.21	42.6	-	-	-	-
5		-	-	-	-	-	-	-	-	0.40	39.4	0.19	39.3	-	-	-	-
4.5		-	-	-	-	-	-	-	-	0.36	36.0	0.18	36.0	0.37	36.7	0.18	35.8
4		-	-	-	-	-	-	-	-	-	-	-	-	0.34	33.1	0.16	32.3
3.5		-	-	-	-	-	-	-	-	-	-	-	-	0.30	29.4	0.14	28.7
3		-	-	-	-	-	-	-	-	-	-	-	-	0.26	25.8	0.13	25.1
2.5		-	-	-	-	-	-	-	-	-	-	-	-	0.23	22.1	0.11	21.6
2		-	-	-	-	-	-	-	-	-	-	-	-	0.19	18.5	0.09	18.0
1.5		-	-	-	-	-	-	-	-	-	-	-	-	0.15	15.0	0.07	14.7
1		-	-	-	-	-	-	-	-	-	-	-	-	0.12	11.5	0.06	11.3
0.5		-	-	-	-	-	-	-	-	-	-	-	-	0.09	8.0	0.05	7.9

※1列あたり最長10mです。(AE92706は最長4.5m、AE92707は最長9mまでです。)

型 番 AL 93013

色・形 電球色(2700K)・演色性(Ra80)

20220727

単位：mm 第三角法(JIS A4)

コイズミ照明株式会社